



## Retune Guide for Hills HSMT-200 HD Freeview Receiver

(8 easy steps for customers to follow for auto tune of the STB)

### STEP 1.

Push **MENU** button on the Hills remote control and Main Menu screen will appear.



### STEP 2.

Move to the right, by using the **right arrow button** on the Hills remote, until Setup is highlighted in yellow.




### STEP 3.

Move down on the side menu, by using the **down arrow button** on the Hills remote, until Auto Scan is in yellow.




### STEP 4.

Push **ENTER** button on the Hills remote and enter the PIN code: 0000 (four zeros).

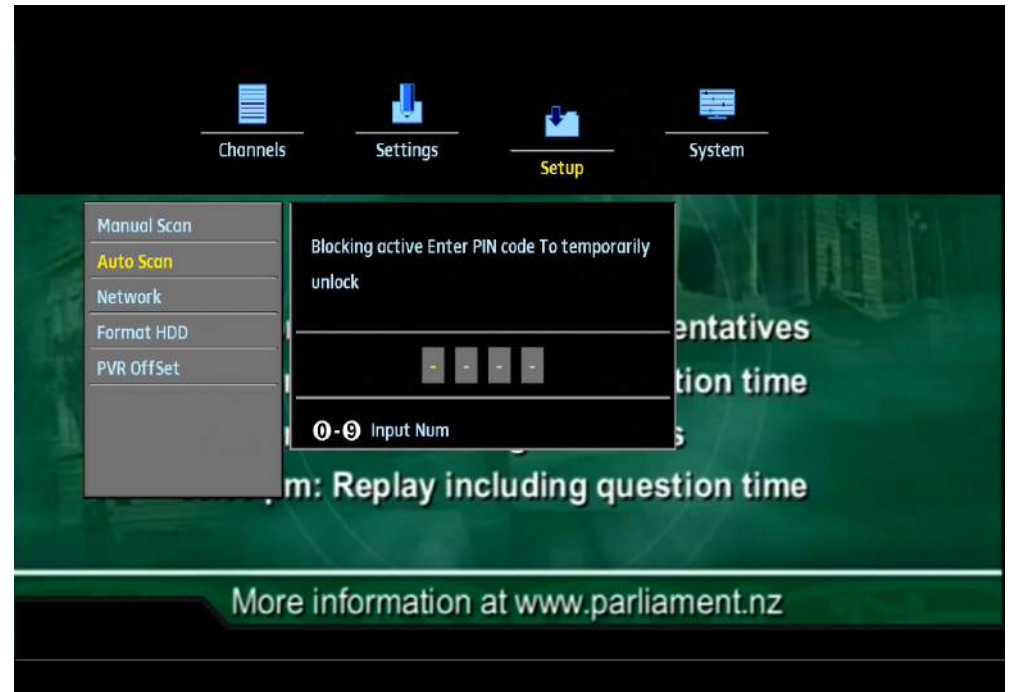

### STEP 5.

Push *ENTER* button on the Hills remote to start Scan.

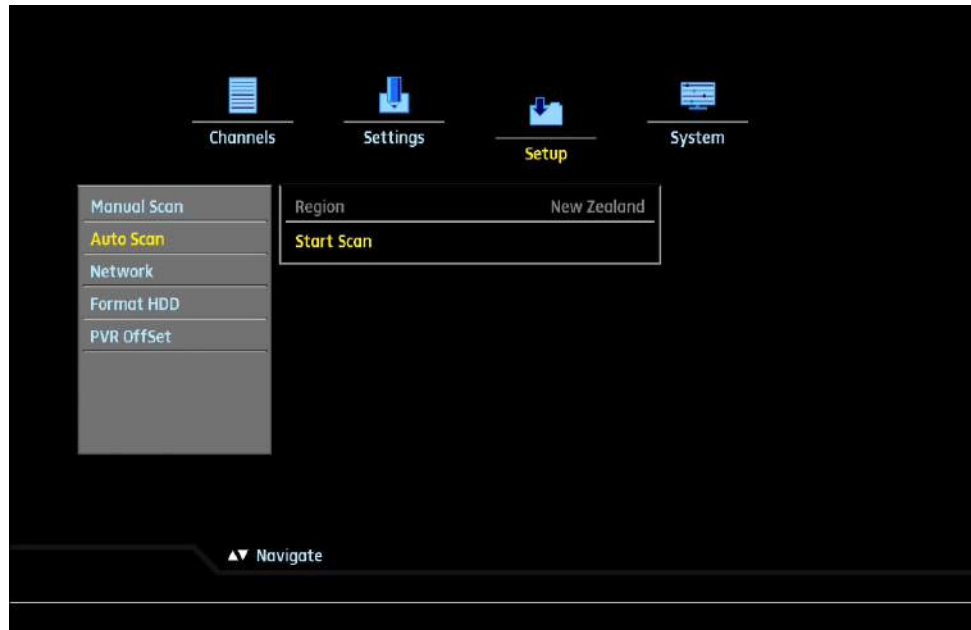

### STEP 6.

Go down by using the **down arrow button** on the Hills remote, to highlight **Yes** in yellow. Push *ENTER* button.



### STEP 7.

Please wait until Scanning is complete. Follow channels found and orange progress bar for information.



### STEP 8.

Once Scanning is finished, little notification window will pop up, after which picture will go to one of the channels.



2014. Hills Antenna & TV systems