



MARCH 15 2017

TSB#C1704 INSTALLING TANK SENSOR ON SSP TANKS (ALL SSP MODEL INDIRECTS)

NOTICE: THE FOLLOWING EXPLAINS/CLARIFIES HOW TO INSTALL AN INDIRECT TANK SENSOR (PART # 7250P-325) ON AN SSP INDIRECT

Follow these instructions to identify.

REMOVE THE COVER




REMOVE THE THERMOSTAT



LOOSEN THE BOLTS AND MAKE SURE SURFACE IS CLEAN OF DEBRIS



**CAREFULLY BEND THE HOLDING WIRE 90 DEGREES AND SLIDE THE SENSOR BEHIND THE BRACKET
THEN RETIGHTEN THE BOLTS**

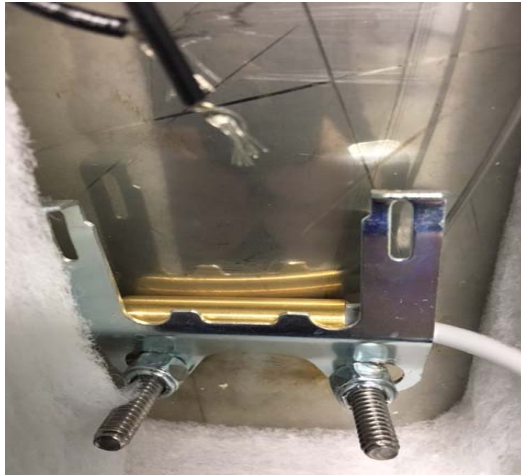

STRIP BACK THE WIRES ON THE SENSOR EXPOSING THE STRANDED WIRE AND SECURE WITH WIRE NUTS TO EXISTING BLACK THERMOSTAT WIRES



COIL UP EXTRA WIRE

REPLACE INSULATION



REPLACE COVER



REUSE TOP TERMINALS



We apologize for any inconvenience.
For Further Assistance, Contact Technical Support at
1-800-323-9651 or techsupport@htproducts.com